




Video Recording Monitor

Memory I

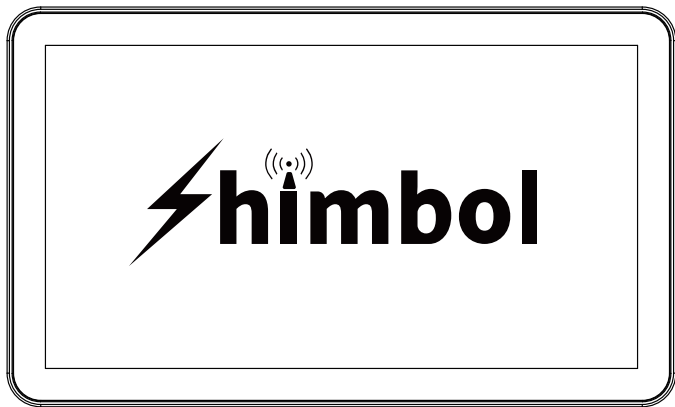

Instruction Manual

Shenzhen ZO Video Technology Co., Ltd.

Packing list




Monitor*1




SD card*1




Tempered Screen Protector*1



User Manual*1



30cm HDMI Cable*1



Hot Shoe Mount*1

Monitor*1

30cm HDMI Cable*1


SD card *1

Tempered Screen Protector*1

Hot Shoe Mount*1


User Manual*1

Buttons and Ports

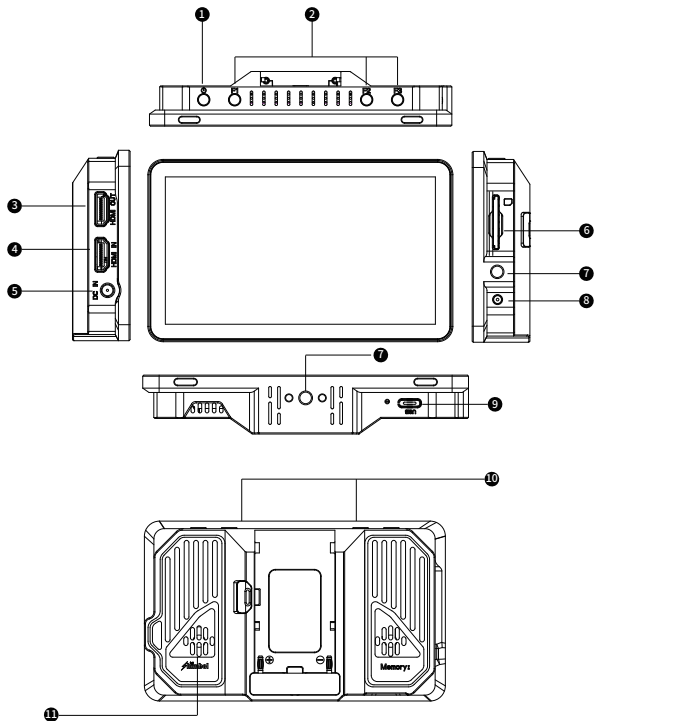

- | | | | |
|------------------------------|----------------------------------|---------------------------------|-------------------------------|
| 1 Power ON/OFF Button | 2 Custom Function Buttons | 3 HDMI Output | 4 HDMI Input |
| 5 DC Input | 6 SD Card Slot | 7 1/4"-20 Thread Hole | 8 3.5mm Headphone Jack |
| 9 USB Upgrade Port | 10 NP-F Battery Plate | 11 Heat Dissipation Port | |

User Interface

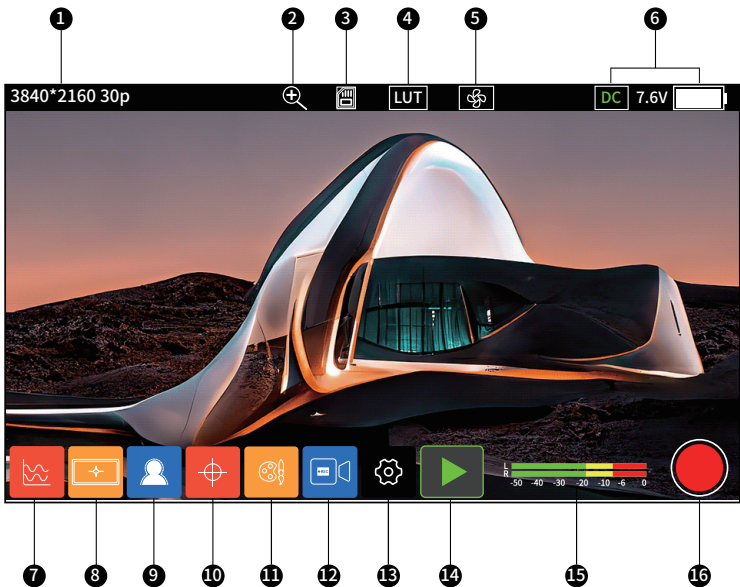

1 Resolution

5 Fan Status

9 Focus Menu

13 System Settings

2 Zoom

6 Power Indication

10 Exposure Menu

14 Playback Button

3 SD Card

7 Waveform Menu

11 Color Menu

15 Audio Meter


4 3D-LUT

8 Marker Menu


12 Recording & Playback
Menu

16 REC Button
Menu


User Interface

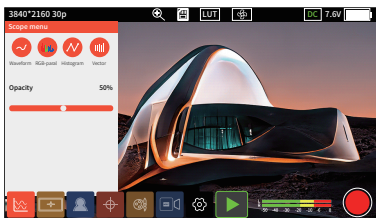


Scope Menu

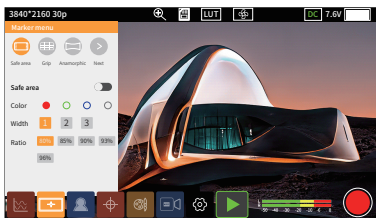


Marker Menu

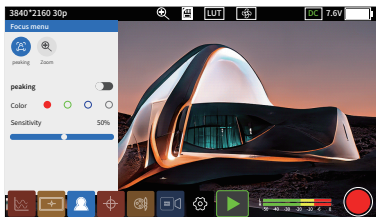


Focus Menu

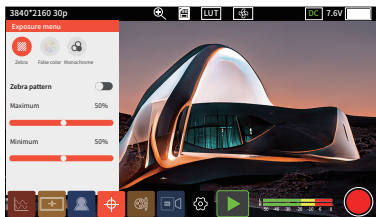

Exposure Menu

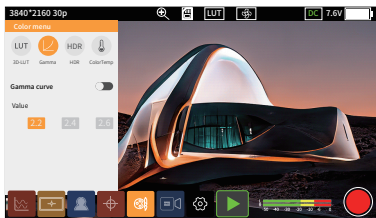

Color Menu

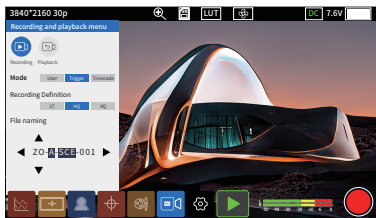


Recording & Playback Menu

Function Instruction

1. Short press the power on/off button to turn on the monitor, long press 3 seconds to turn it off.

2.3D-LUT import method

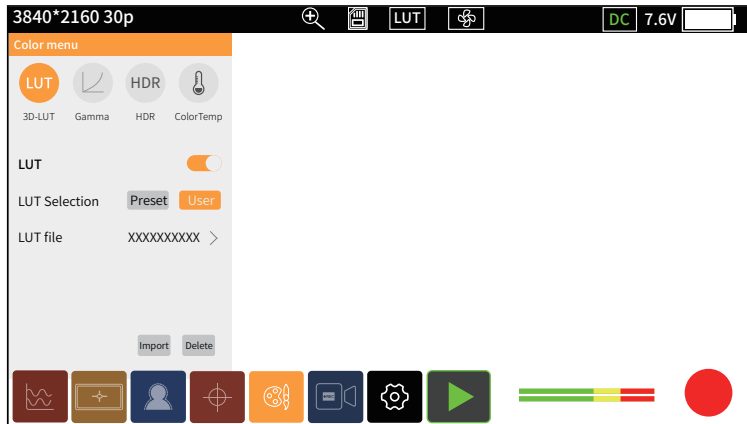


- 1 Place the LUT file in the LUT folder on the SD card and insert the SD card into the monitor
- 2 Click the Color Menu-3D-LUT, turn on , and then selecting Custom, click the Import button and wait for the system to retrieve the LUT file in the SD card that needs to be loaded
- 3 Click on the LUT file that needs to be loaded, then click Import and wait for the file to be imported into the system
- 4 Click the LUT file, enter the file selection, select the desired LUT, and click to confirm that the LUT is loaded successfully

Note: LUT file name only support English, do not allow any other languages , special characters, spaces, otherwise it will fail to be imported !

Function Instruction

3.The Way to Customize the File Name

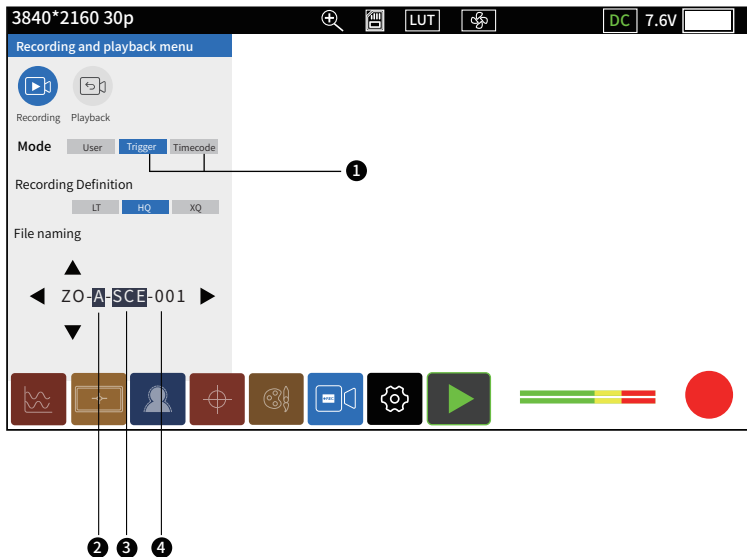

- 1 Trigger/TimeCode camera synchronization recording function
- 2 This position represents the camera position, click up and down to adjust
- 3 This position represents the shooting site, click up and down to adjust
- 4 This position represents the number of cameras, it is not adjustable and the digital number increases with the number of shootings

Function Instruction

4.RGB Gain and Offset Control Functions

The screenshot displays the 'Function' menu with 'RGB gain' and 'RGB offset' controls. The top status bar shows '3840*2160 30p', 'LUT', 'DC 7.6V', and a battery icon. The left sidebar has 'Display', 'Setting', 'Function', and 'System' tabs. The main area shows 'RGB gain' with sliders for R, G, and B at 100%, and 'RGB offset' with sliders for R, G, and B at 100%. A 'Reset' button is present for each section. The bottom dock contains icons for waveform, home, user, target, tools, video, settings, play, and a color bar with a red circle.

3840*2160 30p LUT DC 7.6V

Display

Setting

Function

System

RGB gain

R 100%

G 100%

B 100%

Reset

RGB offset

R 100%

G 100%

B 100%

Reset

RGB gain

RGB offset

5.Formatting SD Cards

The screenshot displays the 'Function' menu with 'SD card format' selected. The top status bar shows '3840*2160 30p', 'LUT', 'DC 7.6V', and a battery icon. The left sidebar has 'Display', 'Setting', 'Function', and 'System' tabs. The main area shows 'Scan' (Normal/Underscan), 'Backlight' (50%), 'Volume' (50%), 'SD card format' (with a right arrow), and 'Fan status' (Automatic/Off/Slow/Fast). The bottom dock contains icons for waveform, home, user, target, tools, video, settings, play, and a color bar with a red circle.

3840*2160 30p LUT DC 7.6V

Display

Setting

Function

System

Scan Normal Underscan

Backlight 50%

Volume 50%

SD card format >

Fan status: Automatic Off Slow Fast

Notes

1. Correlation of Function States

Zoom, Anamorphic, Waveform, these three functions can only be opened one at a time. Such as when the Anamorphic function is open, has opened the Zoom or Waveform will be forced to close

2. SD Card Identification and Use Problems

2.1 The SD card of this product does not support hot-swapping, if the SD card is inserted and removed during use, causing abnormalities such as the card cannot be recognized and the screen interface cannot be operated, please restart the device

2.2 The SD card format used in this monitor is FAT32 and it is different from the card format used in the camera, so can not be mixed

2.3 The newly purchased SD card has to formatting before normal use

2.4 Recommended card capacity is 32G-512G

3. The Abnormal Phenomenon of Using Recording and Playback

Synchronous recording (Trigger/TimeCode)

3.1 The camera needs to support HDMI Trigger/TimeCode

3.2 Trigger/TimeCode function is turned on

3.3 Some of the cameras have been having TimeCode output, when TimeCode mode ON, will trigger automatic recording

Technical Parameters


Model No.:	Memory I
Interface:	DC In , HDMI input, HDMI output, 3.5mm Headphone out, SD card slot, Type-C
Power Supply Method	NP-F / DC IN
Input Voltage	DC 6.5V-16.8V
Power Consumption	<10W
Screen Size	5.5"TP
Brightness	2000cd/m ²
Contrast Ratio	1200:1
Screen Resolution	1920*1080
Input Signal Formats	4096*2160P25/24/23.98 3840*2160P30/23.98/25/24/23.98 1920*1080p60/59.94/50/30/29.97/25/24/23.98 1920*1080i60/59.94/50 1280*720p60/59.94/50
Output Signal Formats	4096*2160P25/24/23.98 3840*2160P30/23.98/25/24/23.98 1920*1080p60/59.94/50/30/29.97/25/24/23.98 1920*1080i60/59.94/50 1280*720p60/59.94/50
Video Recording Format	MP4(A single file can't exceed 3.6G) ^①
LUT Format	cube file (17*17*17和33*33*33) ^②
Firmware Updates	SD card updates
Audio Frequency	48kHz
Weight	283g
Unit Size	146.6*87.6*26.5mm

Please note: ① Recording file

It is under "Video" folder of root directory in SD card.

② The LUT file to be imported

It is under "Lut" folder of root directory in SD card, and the LUT files should not exceed 50.

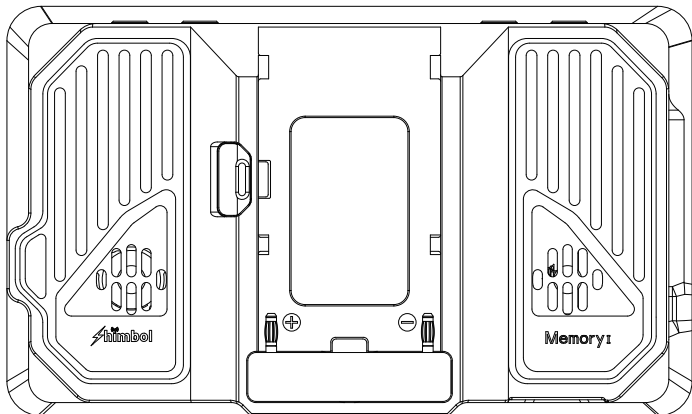

Tel+86 0755-21004986

URL:www.zeroone-video.com

Address:2C, 2nd Floor, Building 6, Longbi Industrial Park
No.27 Dafa Road, Bantian Street, Longgang District, Shenzhen
Shenzhen ZO Video Technology Co., Ltd.